


05/24/00



Jc715 U.S. PTO

PTO/SB/05 (Modified)

**UTILITY
PATENT APPLICATION
TRANSMITTAL**

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No.

95-426

First Named Inventor or
Application Identifier:

PARASU

Title: Apparatus and Method for Contacting a Customer Support Line on
Customer's Behalf and Having a Customer Support Representative Contact
the Customer**APPLICATION ELEMENTS**See MPEP chapter 600 concerning utility patent
application contents.**ADDRESS TO:****Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231**

1. ☐ Fee Transmittal Form
2. ☒ Specification, Claims & Abstract [Total Pages: 20]
3. ☒ Formal Drawing(s) (35 USC 113) [Total Sheets: 6]
4. ☐ Oath or Declaration [Total Pages:]
- a. ☐ Newly executed (original or copy)
- b. ☐ Copy from a prior application (37 CFR 1.63(d)) (for continuation/divisional with Box 17 completed)
- i. ☐ DELETION OF INVENTOR(S)
- Signed statement attached deleting inventor(s) named in the prior application,
see 37 CFR 1.63(d)(2) and 1.33(b).
5. ☐ Incorporation by Reference (usable if Box 4b is checked)
The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under
Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby
incorporated by reference therein.
6. ☐ Microfiche Computer Program (Appendix)
7. ☐ Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary)
- a. ☐ Computer Readable Copy
- b. ☐ Paper Copy (identical to computer copy)
- c. ☐ Statement verifying identity of above copies

Jc823 U.S. PTO
09/577320

05/24/00

ACCOMPANYING APPLICATION PARTS

8. ☐ Assignment Papers (cover sheet & document(s))
9. ☐ 37 CFR 3 73(b) Statement (when there is an assignee) ☐ Power of Attorney
10. ☐ English Translation Document (if applicable)
11. ☐ Information Disclosure Statement (IDS)/PTO-1449 ☐ Copies of IDS Citations
12. ☐ Preliminary Amendment
13. ☒ Return Receipt Postcard (MPEP 503) (Should be specifically itemized)
14. ☐ Small Entity Statement(s) ☐ Statement filed in prior application, status still proper and desired.
15. ☐ Certified Copy of Priority Document(s) (if foreign priority is claimed)
16. ☐ Other:

17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No: / **18. CORRESPONDENCE ADDRESS****Leon R. Turkevich, Esq.
CUSTOMER NO.: 23164
2000 M Street, N.W., 7th Floor
Washington, D.C. 20036-3307**

Name (Type)

Leon R. Turkevich

Registration No.
(Att./Agent)

34,035

Signature

Date

May 24, 2000

FOR

INVENTOR:

PREPARED BY:

Leon R. Turkevich, Esq.
2000 M STREET, N.W., 7th Floor
WASHINGTON, D.C. 20036-3307
(202) 261-1059

APPARATUS AND METHOD FOR CONTACTING A CUSTOMER SUPPORT LINE ON CUSTOMER'S BEHALF AND HAVING A CUSTOMER SUPPORT REPRESENTATIVE CONTACT THE CUSTOMER

BACKGROUND OF THE INVENTION

FIELD OF THE INVENTION

The present invention relates to generating and executing voice enabled web applications within a hypertext markup language (HTML) and hypertext transport protocol (HTTP) framework.

5 DESCRIPTION OF RELATED ART

10 The evolution of the public switched telephone network has resulted in a variety of voice applications and services that can be provided to individual subscribers and business subscribers. Such services include voice messaging systems that enable landline or wireless subscribers to record, playback, and forward voice mail messages. However, the ability to provide enhanced services to subscribers of the public switched telephone network is directly affected by the limitations of the public switched telephone network. In particular, the public switched telephone network operates according to a protocol that is specifically designed for the transport of voice signals; hence any modifications necessary to provide enhanced services can only be done by switch vendors that have sufficient know-how of the existing public switched telephone network infrastructure.

15 An IP network, such as the World Wide Web, the Internet, or a corporate intranet, provides client-server type application services for clients by enabling the clients to request application services from remote servers using standardized protocols, for example hypertext transport protocol (HTTP). The web server application environment can include web server software, such as Apache, implemented on a computer system attached to the IP network. Web-based applications are composed of HTML pages, logic, and database functions. In addition, the web server may provide logging and monitoring capabilities.

20 In contrast to the public switched telephone network, the open standards-based IP network has enabled the proliferation of web based applications written by web application developers using ever increasing web development tools. Hence, the ever increasing popularity of web applications and web development tools provides substantial resources for application developers to develop

25

robust web applications in a relatively short time and an economical manner. However, one important distinction between telephony-based applications and web-based applications is that telephony-based applications are state aware, whereas web-based applications are stateless.

In particular, telephony applications are state aware to ensure that prescribed operations between the telephony application servers and the user telephony devices occur in a prescribed sequence. For example, operations such as call processing operations, voicemail operations, call forwarding, etc., require that specific actions occur in a specific sequence to enable the multiple components of the public switched telephone network to complete the prescribed operations.

The web-based applications running in the IP network, however, are state-less and transient in nature, and do not maintain application state because application state requires an interactive communication between the browser and back-end database servers accessed by the browsers via a HTTP-based web server. However, an HTTP server provides asynchronous execution of HTML applications, where the web applications in response to reception of a specific request in the form of a URL from a client, instantiate a program configured for execution of the specific request, send an HTML web page back to the client, and terminate the program instance that executed the specific request. Storage of application state information in the form of a "cookie" is not practical because some users prefer not to enable cookies on their browser, and because the passing of a large amount of state information as would normally be required for voice-type applications between the browser and the web application would substantially reduce the bandwidth available for the client.

Commonly-assigned, copending application serial number 09/480,485, filed January 11, 2000, entitled Application Server Configured for Dynamically Generating Web Pages for Voice Enabled Web Applications (Attorney Docket 95-409), the disclosure of which is incorporated in its entirety herein by reference, discloses an application server that executes a voice-enabled web application by runtime execution of extensible markup language (XML) documents that define the voice-enabled web application to be executed. The application server includes a runtime environment that establishes an efficient, high-speed connection to a web server. The application server, in response to receiving a user request from a user, accesses a selected XML page that defines at least a part of the voice application to be executed for the user. The XML page may

describe any one of a user interface such as dynamic generation of a menu of options or a prompt for a password, an application logic operation, or a function capability such as generating a function call to an external resource. The application server then parses the XML page, and executes the operation described by the XML page, for example dynamically generating an HTML page having voice application control content, or fetching another XML page to continue application processing. In addition, the application server may access an XML page that stores application state information, enabling the application server to be state-aware relative to the user interaction. Hence, the XML page, which can be written using a conventional editor or word processor, defines the application to be executed by the application server within the runtime environment, enabling voice enabled web applications to be generated and executed without the necessity of programming language environments.

Hence, web programmers can write voice-enabled web applications, using the teachings of the above-incorporated application serial number 09/480,485, by writing XML pages that specify respective voice application operations to be performed.

When using a public switched telephone network to call a customer support line, typically the caller or customer is placed on hold and the call is placed in a queue. When the caller reaches the top of the queue, often after waiting 15-20 minutes, the call is answered by the customer service representative. Hence, the caller wastes time and network resources in trying to contact the support representative.

Conventional callback systems have been employed to call a caller back when the called party is available. However, such systems must be present at the called party's premises and require knowledge of the public switch telephone network to implement.

SUMMARY OF THE INVENTION

There is a need for an arrangement that enables voice applications to be implemented on an IP packet switched network using the open standards-based flexibility of the IP network.

There is also a need for an arrangement that enables voice applications to be implemented using HTTP and HTML open standards, enabling development of voice applications by individuals

that do not have expertise in the public switched telephone network. For example, there is a need for arrangement that enables voice applications to be designed by web programmers.

There is also a need for an arrangement that enables voice applications to be implemented using an IP network.

There is also a need for an arrangement that enables an application server to call a second party on behalf of a caller, to call back the caller when the second party is available, and to bridge the calls connecting the second party and the caller so that the caller need not wait on hold in order to speak with the second party.

These and other needs are attained by the present invention, where an application server is configured for executing an executable voice application. The application server includes an application runtime environment which generates a first hypertext markup language (HTML) document based on an XML document. The first HTML document has instructions including the call number for accessing the second party. The application runtime environment generates a second HTML document based in a prescribed input received from the second party. The second HTML document has instructions for connecting the second party with the user. A storage medium is configured for storing the XML document.

According to one aspect of the present invention, a method is provided in an application server configured for responding to hypertext transport protocol (HTTP) requests. The method includes storing, in response to a first HTTP request, an XML document that specifies for a user, a call number of a second party. The stored XML document is retrieved based on a second HTTP request by the user. A first HTML document is generated based on the retrieved XML document. The first HTML document has instructions including the call number for accessing the second party. A second HTML document is generated based on a prescribed input received from the second party. The second HTML document has instructions for connecting the second party with the user. Hence, a user may speak with a called party without ever having to remain on hold.

Additional advantages and novel features of the invention will be set forth in part in the description which follows and in part will become apparent to those skilled in the art upon examination of the following or may be learned by practice of the invention. The advantages of the

present invention may be realized and attained by means of instrumentalities and combinations particularly pointed out in the appended claims.

BRIEF DESCRIPTION OF THE DRAWINGS

Reference is made to the attached drawings, wherein elements having the same reference numeral designations represent like elements throughout and wherein:

Figure 1 is a block diagram illustrating a novel paradigm that enables unified voice messaging services and data services to be provided via an IP network using browser audio control according to an embodiment of the present invention.

Figure 2 is a diagram illustrating in further detail implementation of voice applications on the IP network of Figure 1 according to an embodiment of the present invention.

Figure 3 is a diagram illustrating an XML document configured for defining a voice application operation for the application server of Figures 1 and 2.

Figure 4 is a diagram illustrating a browser display of a form for user entry of voice application parameters.

Figure 5 is a diagram illustrating in detail the application server of Figures 1 and 2 according to an embodiment of the present invention.

Figure 6 is a flow diagram illustrating a method of providing user callback according to an embodiment of the present invention.

BEST MODE FOR CARRYING OUT THE INVENTION

The disclosed embodiment is directed to an arrangement for providing unified voice messaging services and data services via an IP network using a web browser having audio control for voice enabled web applications. The ability to provide unified voice messaging services via an IP network enables existing web servers on the World Wide Web or in corporate intranets to support telephone applications on a scalable and economic platform. Moreover, providing unified voice messaging services via an IP network enables use of open standards that permits web programmers to use existing web programming techniques to design and implement voice telephone applications.

Figure 1 is a block diagram illustrating an architecture that provides unified voice messaging services and data services via an IP network using browser audio control according to an embodiment of the present invention. As shown in Figure 1, each of the clients (tiny clients, skinny clients, thin clients and fat clients) are able to communicate via a single, unified architecture 60 that enables voice communications services between different clients, regardless of whether the client actually has browser capabilities. For example, the fat client 42a and the thin client 42b are able to execute voice enabled web applications without any hardware modification or any modification to the actual browser; rather, the browsers 56 in the clients 42a and 42b merely are provided with an executable voice resource configured for providing browser audio control, described below.

The skinny clients 18a, 18b, and 18c and the tiny clients 18d, 18e, and 18f also have access to the unified voice messaging services in the unified network 60 by accessing a proxy browser 62, configured for providing an IP and HTTP interface for the skinny clients and the tiny clients. In particular, browsers operate by interpreting tags within a web page supplied via an HTTP connection, and presenting to a user media content information (e.g., text, graphics, streaming video, sound, etc.) based on the browser capabilities; if a browser is unable to the interpreting a tag, for example because the browser does not have the appropriate executable plug-in resource, then the browser typically will ignore the unknown tag. Hence, the proxy browser 62 can provide to each of the skinny clients and tiny clients the appropriate media content based on the capabilities of the corresponding client, such that the cordless telephone 18a and telephone 18c would receive analog audio signals played by the proxy browser 62 and no text information (unless a display is available); the fax machine 18b and pager 18f would only receive data/text information, and the cellular telephone 18d and the handheld computing device 18e would receive both voice and data information. Hence, the proxy browser 62 interfaces between the IP network and the respective local access devices for the skinny clients and the tiny clients to provide access to the unified messaging network 60.

The proxy browser 62 and the web browsers 56 within the fat client 42a and the thin client 42b execute voice enabled web applications by sending data and requests to a web server 64, and receiving hypertext markup language (HTML) web pages from the web server 64, according to

hypertext transport protocol (HTTP). The web server 64 serves as an interface between the browsers and an application server 66 that provides an executable runtime environment for XML voice applications 68. For example, the web server 64 may access the application server 66 across a common Gateway Interface (CGI), by issuing a function call across an application programming interface (API), or by requesting a published XML document or an audio file requested by one of the browsers 56 or 62. The application server 66, in response to receiving a request from the web server 64, may either supply the requested information in the form of an HTML page having XML tags for audio control by a voice resource within the browser, or may perform processing and return a calculated value to enable the browser 56 or 62 to perform additional processing. In particular, the application server 66 may either access static XML pages, or the application server 66 may access stored XML application pages (i.e., pages that define an application) and in response generate new XML pages during runtime and supply the generated XML pages to the web server 64.

Figure 2 is a diagram that illustrates in further detail the network 60 of Figure 1. As shown in Figure 2, the arrangement of providing browser audio control for voice enabled web applications enables voice application services to be implemented in a web server paradigm for many different telephony services, including authentication and billing services 70, domain name services 72, local directory services 74, registry directory and event services 76, and management services 78.

Figure 2 also illustrates in further detail the browser and web application server interaction. In particular, the thin clients 42b (and fat clients 42a) may be configured for accessing the web server 64 via a direct IP connection 82 to a router 84. The thin client 42b can directly access the web server 64 for voice enabled web application services if the thin client 42b has a browser 56 and an executable voice resource 86, for example an executable XML aware plug-in resource, described below, or a Java applet embedded within a received HTML page. Alternatively, the thin client 42b may access the web server 64 via the public switched telephone network 10, where an IP gateway 87a includes a voice over IP interface 88 that sends information to the server 64 using an HTTP connection 89 via a firewall 90.

Since the skinny clients and tiny clients 18 do not have browser resources, the skinny clients and tiny clients 18 access the proxy browser 62 via the PSTN 10 and the IP gateway 87b. The IP

gateway 87b includes both a proxy browser 62 and a voice resource 86, enabling the IP gateway 87 to provide all audio control service for the skinny clients and tiny clients 18. Hence, the PSTN 10 is used merely for transfer of analog audio signals, with intelligent application processing being provided by the proxy browser 62. Note that if one of the telephones 18c' is an IP telephone, then it can access the server 64 via an IP connection 82; in this case, the browser internal to the IP telephone 18c' would process only audio functions, and would ignore any tags associated with text or image content.

As shown in Figure 2, the web server 64, the application server 66, and the voice web applications 68 reside within a gateserver 92. The gateserver 92 includes a browser based XML editor tool 94 that enables a web programmer to design voice applications using XML pages, described below. The XML pages are stored as XML applications and functions 96, for example within a database accessible by the application server 66. The XML pages stored within the XML application and functions 96 may be stored as static pages to be fetched by the web server 64 and supplied to a browser, however the XML pages may also define the actual application to be executed by the application server 66 in runtime. Hence, the application server 66 may execute stored XML applications and functions 96, and in response generate dynamic HTML having XML tags, also referred to as HTML/XML pages.

According to the disclosed embodiment, the browsers 56 and 62 provide audio control for voice enabled web applications based on the HTML-XML pages supplied by the application server 66 to the web server 64 for transport across an HTTP connection. The application server 66 executes stored XML applications, also referred to generally as a web applications, in response to HTML requests from the user. During execution of the stored XML applications, the application server 66 stores in a separate registry 83 (Figure 5) a data record, also referred to as a "brownie", that specifies the application state for at least one XML application instance. As described in commonly assigned, copending application serial no. 09/538,899, filed March 30, 2000, entitled "Apparatus And Method For Providing Server State And Attribute Management For Multiple-Threaded Voice Enabled Web Applications" (Attorney Docket 95-431), the disclosure of which is incorporated in its entirety herein by reference, the "brownie" is configured for storing user attribute information and

application state information for multiple users associated with a given voice applications session. Hence, the application server 66 may simultaneously and independently control voice application operations for multiple users that may be associated according to a prescribed application condition, for example the possibility of bridging the users together for a phone call or a phone conference.

Hence, the use of a “brownie” configured for storing attributes and state information for multiple users enables the application server to effectively control multiple “lines” for the proxy browser 62 controlling, for example, a voice over IP telephony switch.

As described above, conventional application development techniques involving writing application code using a conventional word processor require a user to have familiarity with executable code syntax. Although use of XML documents to define voice application operations eliminates the necessity of writing programming code, use of a conventional word processor for development of the XML documents still requires the application developer to have substantial knowledge of XML syntax, limiting the ability of a typical user lacking expertise in application development or XML syntax to personalize a voice application.

Certain development tools having direct access to the application server 66 can be used to establish context information used by the application runtime environment within the application server 66 for execution application operations based on parsing of XML documents. In particular, development tools 81 such as a graphic based development system, a forms-based development system, an editor-based development system, or an outline-based development system may be used to define XML tags and procedure calls for the application runtime environment. The development tools 81 may be used to establish an application and resource database 97 to define low-level operations for prescribed XML tags, for example dynamically generating an XML menu page using executable functions specified by a menu rule set in response to detecting a menu tag, performing a logical operation using executable functions specified by a logic rule set in response to a decision tag, or fetching an audio (.wav) file in response to detecting a sound tag.

The development tools 81 may be used to establish an application programming interface (API) library 99 (e.g., a SQL interface) for the application runtime environment, enabling the application server 66 to issue prescribed function calls to established services, such as IMAP, LDAP,

or SMTP. The library 99 may be implemented as dynamically linked libraries (DLLs) or application programming interface (API) libraries. If desired, the development tools 80 may also be used to generate an XML application as a stored text file 95, without the use of the forms generated by the application server 66, described below.

A user of the browser 56 typically sends a request to the application server 66 (via the web server 64) for a voice application operation 99, for example using an interface executable by a browser 56 or 62, for accessing new voice mail messages, new facsimile messages, new e-mail messages, and the like. A user of the browser 56 also can send a request to the application server 66 for creating or modifying an XML document defining a voice application operation, via a development tool common gateway interface (CGI). In particular, the web browser 56 posts a user input for an application operation (i.e., an HTTP request) to a first URL for the voice application operation. In contrast, the web browser 56 posts to another URL for accessing the development tool CGI. Accessing the application server via the CGI enables the application server 66 to access a selected XML document, for example the XML document 100 illustrated in Figure 3, in order to dynamically generate a form 102, illustrated in Figure 4, that specifies selected application parameters of the XML document 100. Hence, accessing the application server by posting the user input according to a first URL causes execution of the XML document 100, whereas accessing the application server via the CGI causes the application server 66 to generate a form that specifies the contents of the XML document 100.

Hence, accessing the application server 66 via the CGI enables the web browser to perform different operations on the selected XML document 100, described in further detail in commonly-assigned, copending application serial No. 09/559,637, filed April 28, 2000, entitled "Browser-Based Arrangement For Developing Voice Enabled Web Applications Using Extensible Markup Language Documents" (attorney docket 95-412), the disclosure of which is incorporated in its entirety herein by reference.

Figure 4 illustrates the insertion of the application parameters 106 into respective entry fields 108 by the application server 66 for display of the form 102 by the browser 56. As shown in Figure 4, the application server 66 parses the XML tags 104a, 104b, 104c, ... 104g and in response inserts

the application parameters 106a, 106b, 106c, ... 106g into the respective entry fields 108a, 108b, 108c, ... 108g. For example, the application server 66, in response to detecting the XML text tag 104a, dynamically generates an HTML document that specifies a form 102 having the entry field 108a and including the corresponding application parameter 106a; hence, each of the XML tags 104 has a corresponding entry field 108 within the form 102 specified by the HTML page generated by the application server 66, including XML tags 108g having empty application parameters 106g. Note that XML tags 110 used to define the XML document attributes (and consequently the structure of the form 102) are predefined by one of the developer workstations 81 or the browser based XML editor tool 56b that do not rely on the form 102.

The application server 66 also parses the XML option tags 112 for insertion of menu application parameters 114 into the respective menu entry fields 116. For example, the application server 66 inserts the menu application parameters 114a₁, 114a₂, and 114a₃ into the respective menu entry fields 116a₁, 116a₂, and 116a₃, and inserts the menu application parameters 114c₁, 114c₂, and 114c₃ into the respective menu entry fields 116c₁, 116c₂, and 116c₃ generated by the HTML document.

The application server 66 also specifies an entry field 118 that enables the browser user to specify the filename 120 of the XML document (i.e., the designation used by the application server 66 when referring to the "current state"). In addition, the application server 66 specifies an addition button 122 that enables users to add menu options 112 to an XML document; hence, if the user enters a new file name within the entry field 124 and presses the addition button 122, the browser 56 posts to a prescribed URL to cause the application server to generate a new XML document having a name specified in the field 124, and to generate another HTML form having an additional menu entry field 116 for the new prompt.

The application server also specifies within the HTML form 102 prescribed URLs associated with command hyperlinks 126, such that posting the form 102 by the browser 56 to a corresponding one of the URLs 126 results in a corresponding operation performed by the application server 66.

Hence, the HTML entry form 102 generated by the application server 66 provides all the fields and command functions necessary for a user to create or modify a new or existing XML

document, regardless of whether the XML document is a menu-based XML document or a non-menu XML document.

Figure 5 is a diagram illustrating in detail the application server 66 according to an embodiment of the present invention. The application server 66 is implemented as a server executing a conventional PHP hypertext processor with XML parsing and processing capabilities. As shown in Figure 5, the server system 66 includes an XML parser 220 configured for parsing the application-defining XML documents (e.g., XML document 100) stored in the XML document database 96, or the XML documents (i.e., "brownies") stored in the registry 83 and configured for specifying the state and attributes for respective user sessions. The application server 66 also includes a high speed interface 222 that establishes a high-speed connection between the application server 66 and the web server 64. For example, the PHP hypertext processor includes a high-speed interface for Apache Web servers.

The application server 66 also includes a runtime environment 224 for execution of the parsed XML documents. As described above, the runtime environment 224 may selectively execute any one of user interface operation 225, a logic operation 226, or a procedure call 228 as specified by the parsed XML document by executing a corresponding set of executable functions based on the rule set for the corresponding operation. In particular, the application runtime environment 224 includes a tag implementation module 230 that implements the XML tags parsed by the XML parser 220. The tag implementation module 230 performs relatively low-level operations, for example dynamically generating an XML menu page using executable functions specified by a menu rule set in response to detecting a menu tag, performing a logical operation using executable functions specified by a logic rule set in response to a decision tag, or fetching an audio (.wav) file in response to detecting a sound tag. Hence, the tag implementation module 230 implements the tag operations that are specified within the XML framework of the stored XML documents.

The application server 66 also includes a set of libraries 99 that may be implemented as dynamically linked libraries (DLLs) or application programming interface (API) libraries. The libraries 99 enable the runtime environment 224 to implement the procedures 228 as specified by the appropriate XML document.

The arrangement for executing a personalized voice-enabled web application will now be described. As described above with respect to Figures 2, 3 and 4, a user is able to personalize his or her voice application by sending an HTTP request to the application server 66, for example via a CGI interface, for generation of an HTML document that specifies the form 102 for modifying application parameters of a prescribed XML document. The application server 66 responds to the HTTP request by accessing application document database 72 for retrieval of the selected generic XML document, and by generating the HTML document having the form 102 with the selected application parameters. Once the user modifies (i.e., personalizes) the application parameters within the form 102 and posts the completed form 102 to a prescribed URL via the CGI interface, the application server 66 generates a new user-specific XML document that specifies the voice application operations as personalized by the corresponding user, and stores the user-specific XML document in a user-specific database.

Figure 6 is a flow diagram illustrating the method of executing a voice application according to an embodiment of the present invention. The steps described in Figure 6 can be implemented as executable code stored on a computer readable medium (e.g., a hard disk drive, a floppy drive, a random access memory, a read only the memory, an EPROM, a compact disc, etc.) where the steps to be executed by the application server 66 and the browsers 56 and 62 are stored on computer readable media accessible by the application server 66 and the browsers 56 and 62.

The method begins in step 300, wherein the user by use of the browser 56, sends a request for an HTML form to create a new XML document. The application server 66, in response to receiving the request, outputs in step 310 an HTML form to the browser 56. The user inputs a customer support call number and optionally, the user's call number on the form in step 320. The user's call number may otherwise be stored in a brownie. Optionally, in step 330, the user inputs digits corresponding to menu options and/or account numbers which the user knows will be required prior to speaking with the customer support representative. The proper wait stages may also be entered to ensure the data is processed properly. For example, the user may enter his or her Social Security Number as 123456789 and then press 2 to wait two seconds, and then enter his or her account no. as 34567. The form 102 may also have a record function so that the user can record

a message to be played as an audio (.wav) file, for example, "Your important customer, Mary Smith would like to speak with you. To connect, press 1". Alternatively, a pre-recorded message can be created using the editor tool 94.

The completed form 102 is sent to the application server 66 using an HTTP post (e.g., an HTTP put to a prescribed URL) in step 340. The application server 66 in step 350 parses the HTML form and inserts input application parameters as XML tags into an XML document and stores the XML document in the database 96.

In step 360, the user employs the browser to send a second HTTP request for the voice application operation specified by the stored XML. In step 370, the application server generates an HTML page with XML tags and outputs the HTML page to the proxy browser 62. The HTML page contains tags for dialing the second party and, if necessary, for dialing the digits in response to the prompt sequence. In step 380, the proxy browser 62 parses the HTML page and XML tags for application parameters, and executes the operations specified by the XML tags. In particular, the proxy browser 62 sends a command to the associated telephony device (e.g., PBX or voice over IP gateway) to connect with the customer support line via the PSTN 10 in step 390. In response to any prompt sequence, the digits provided step 400 are dialed. In step 410, the proxy browser 62 plays the pre-recorded or personalized message such as "Your important customer would like to speak with you. To connect, press 1". An input waiting period is provided in step 420.

Step 430 determines if an input is made and if an input is detected, in step 440, the proxy browser send a response to the application server which generates a second HTML document having instructions for connecting the second party with the user. Hence, based on the second HTML document, the proxy browser 62 sends a command to the telephony device to connect with the user and the call is bridged by using the brownies as disclosed in the above-incorporated application 09/538,899. If no input is detected, the messages is played repeatedly. A time-out period may be set to terminate the session if no input is received, for example, in 30 minutes. Thus, in the disclosed embodiment, a customer may speak with a customer support representative without ever having to remain on hold. As disclosed, the customer support line is contacted and the line is maintained until a customer support representative indicates that he or she is willing to talk to the

customer and if so, the customer is called, and the call is bridged.

While this invention has been described in connection with what is presently considered to be the most practical and preferred embodiment, it is to be understood that the invention is not limited to the disclosed embodiments, but, on the contrary, is intended to cover various modifications and equivalent arrangements included within the spirit and scope of the appended claims.

95-426

What is Claimed Is:

1. A method in an application server configured for responding to hypertext transport protocol (HTTP) requests, the method comprising:

storing, in response to a first HTTP request, an XML document that specifies for a user, a call number of a second party,

5 retrieving the stored XML document based on a second HTTP request by the user;
generating a first hypertext markup language (HTML) document, based on the retrieved XML document, having instructions including the call number for accessing the second party, and
selectively generating a second HTML document, based on a prescribed input received from the second party, having instructions for connecting the second party with the user.

10 2. The method according to claim 1, wherein the stored XML document includes a call number of the user and a prompt sequence for accessing the second party, the first HTML document including the prompt sequence and the second HTML document including the call number of the user.

3. The method according to claim 2, further comprising generating a third HTML document that specifies a form including entry fields for the user's call number, the call number of the second party, and the prompt sequence, respectively, the method including receiving an HTTP request including the form specifying the user's call number, the call number of the second party and the prompt sequence, respectively, in the entry field prior to the storing step.

4. The method according to claim 3, wherein the storing step includes dynamically generating the XML document based on the form in the HTTP request.

5. The method according to claim 1, wherein the instructions of the first HTML document include playing a voice message indicating to the second party that the user wants to speak with the

second party.

6. A method in an application server for executing a voice application, the method comprising:

receiving an HTTP request requesting a voice application from a user, the voice application being specified in an XML document including information for connecting with a call number of the user and with a call number of a second party,

generating a first hypertext markup language (HTML) document, based on the XML document, having instructions including the call number for accessing the second party, and

selectively generating a second HTML document, based on a prescribed input received from the second party, having instructions for connecting the second party with the user.

7. The method according to claim 6, wherein the XML document includes a prompt sequence for accessing the second party, the first HTML document including the prompt sequence

8. The method according to claim 7, further comprising generating a third HTML document that specifies a form including entry fields for the user's call number, the call number of the second party, and the prompt sequence, respectively, the HTTP request including the form specifying the user's call number, the call number of the second party and the prompt sequence, respectively, in the entry field.

9. The method according to claim 8, wherein the XML document is dynamically generated based on the form in the HTTP request.

10. The method according to claim 6, wherein the instructions of the first HTML document include playing a voice message indicating to the second party that the user wants to speak with the second party.

11. An application server configured for developing an executable voice application, the system including:

an application runtime environment configured for generating a first hypertext markup language (HTML) document based on an XML document, the first HTML document having instructions including the call number for accessing the second party, and the application runtime environment generating a second HTML document based on a prescribed input received from the second party, the second HTML document having instructions for connecting the second party with the user, and

a storage medium configured for storing the XML document.

12. The application server according to claim 11, wherein the application runtime environment is configured to insert an application parameter into an XML page prior to generating the HTML documents.

13. The application server according to claim 11, wherein the application runtime environment is configured for sending the first HTML document specifying a blank form for creation of the XML document in response to an initial HTTP request specifying creation of the XML document.

14. A computer readable medium having stored thereon sequences of instructions for executing a voice application, the sequences of instructions including instructions for performing the steps of:

receiving, from a browser, an HTTP request that specifies a form having input application parameters specifying information for connecting with a call number of a user and with a call number of a second party,

inserting the input application parameters into an XML document configured for defining an operation of the executable voice application,

generating a first hypertext markup language (HTML) document, based on the XML

document, having instructions including the call number for accessing the second party, and
 selectively generating a second HTML document, based on a prescribed input received from
 the second party, having instructions for connecting the second party with the user.

15. The medium according to claim 13, wherein the XML document includes a prompt
 sequence for accessing the second party.

16. An application server for executing a voice application, the application server
 comprising:

means for storing, in response to a first HTTP request, an XML document that specifies for
 a user, a call number of a second party,

means for generating a first hypertext markup language (HTML) document, based on the
 XML document, having instructions including the call number for accessing the second party, and

means for selectively generating a second HTML document, based on a prescribed input
 received from the second party, having instructions for connecting the second party with the user.

95-426

APPARATUS AND METHOD FOR CONTACTING A CUSTOMER SUPPORT LINE ON
CUSTOMER'S BEHALF AND HAVING A CUSTOMER SUPPORT REPRESENTATIVE
CONTACT THE CUSTOMER

ABSTRACT OF THE DISCLOSURE

A method is provided in an application server configured for responding to hypertext transport protocol (HTTP) requests. The method includes storing, in response to a first HTTP request, an XML document that specifies for a user, a call number of a second party. The stored XML document is retrieved based on a second HTTP request by the user. A first HTML document is generated based on the retrieved XML document. The first HTML document has instructions including the call number for accessing the second party. A second HTML document is generated based on a prescribed input received from the second party. The second HTML document has instructions for connecting the second party with the user. Hence, a user may speak with a called party without ever having to remain on hold.

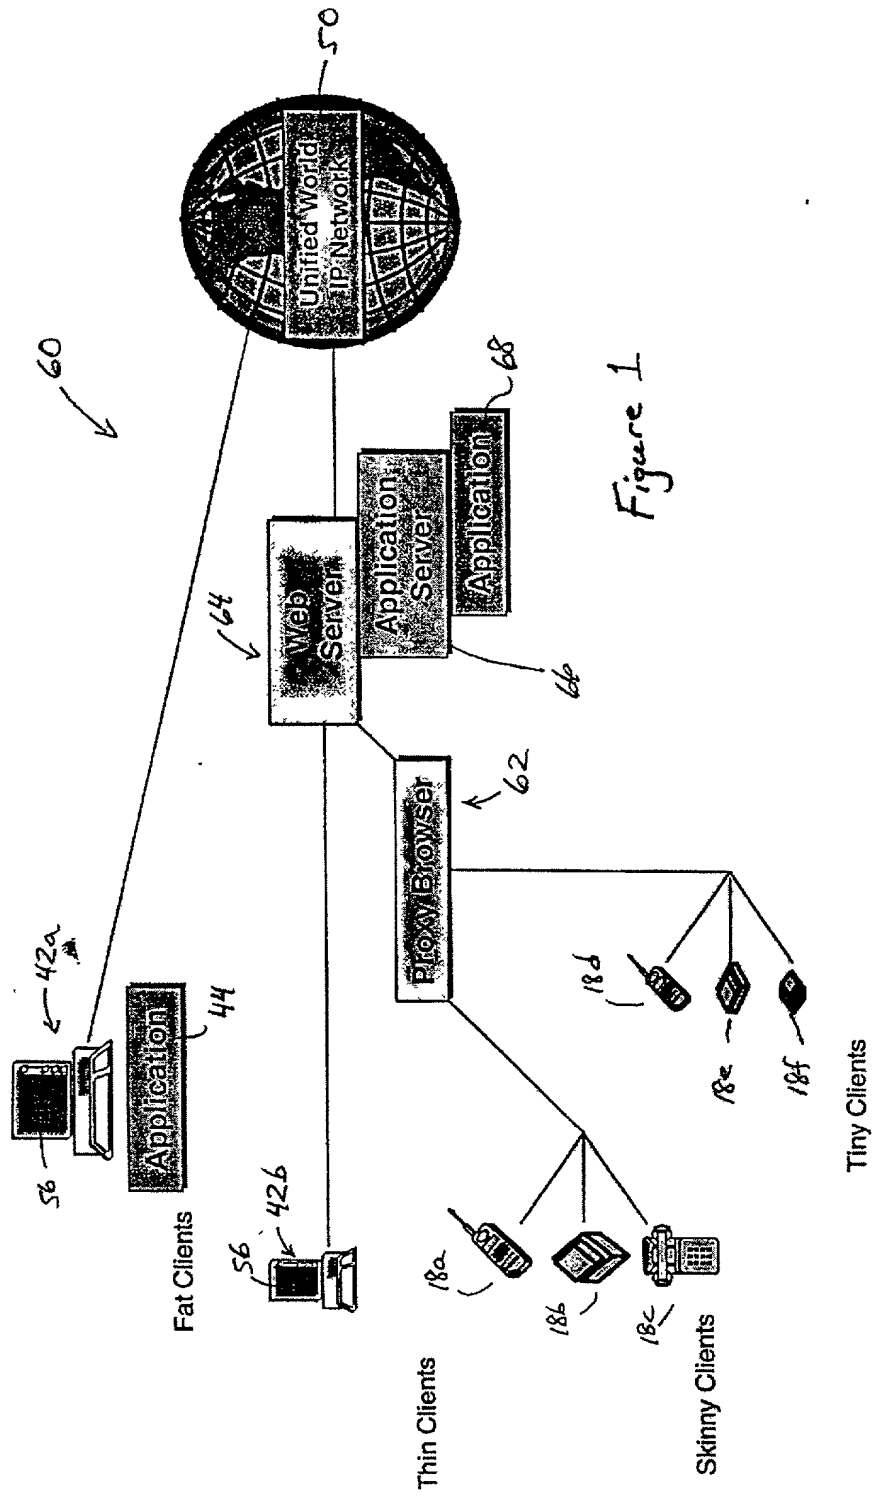
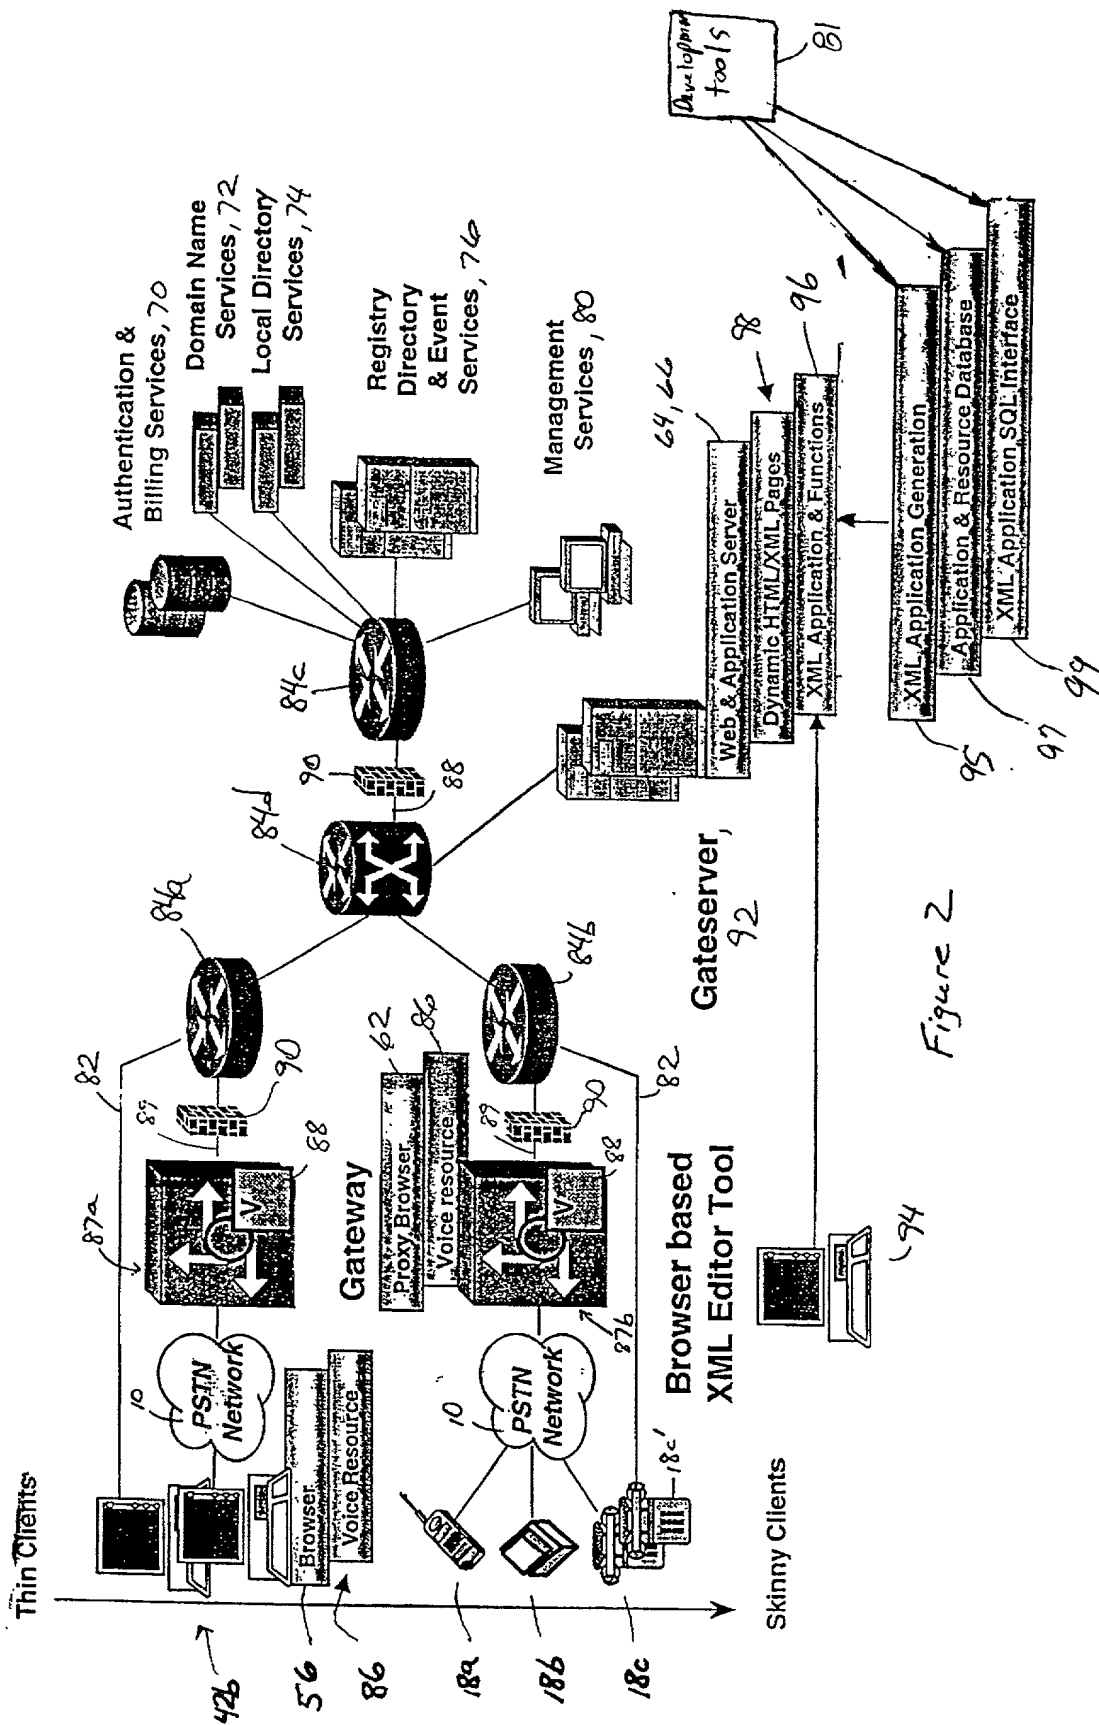


Figure 1



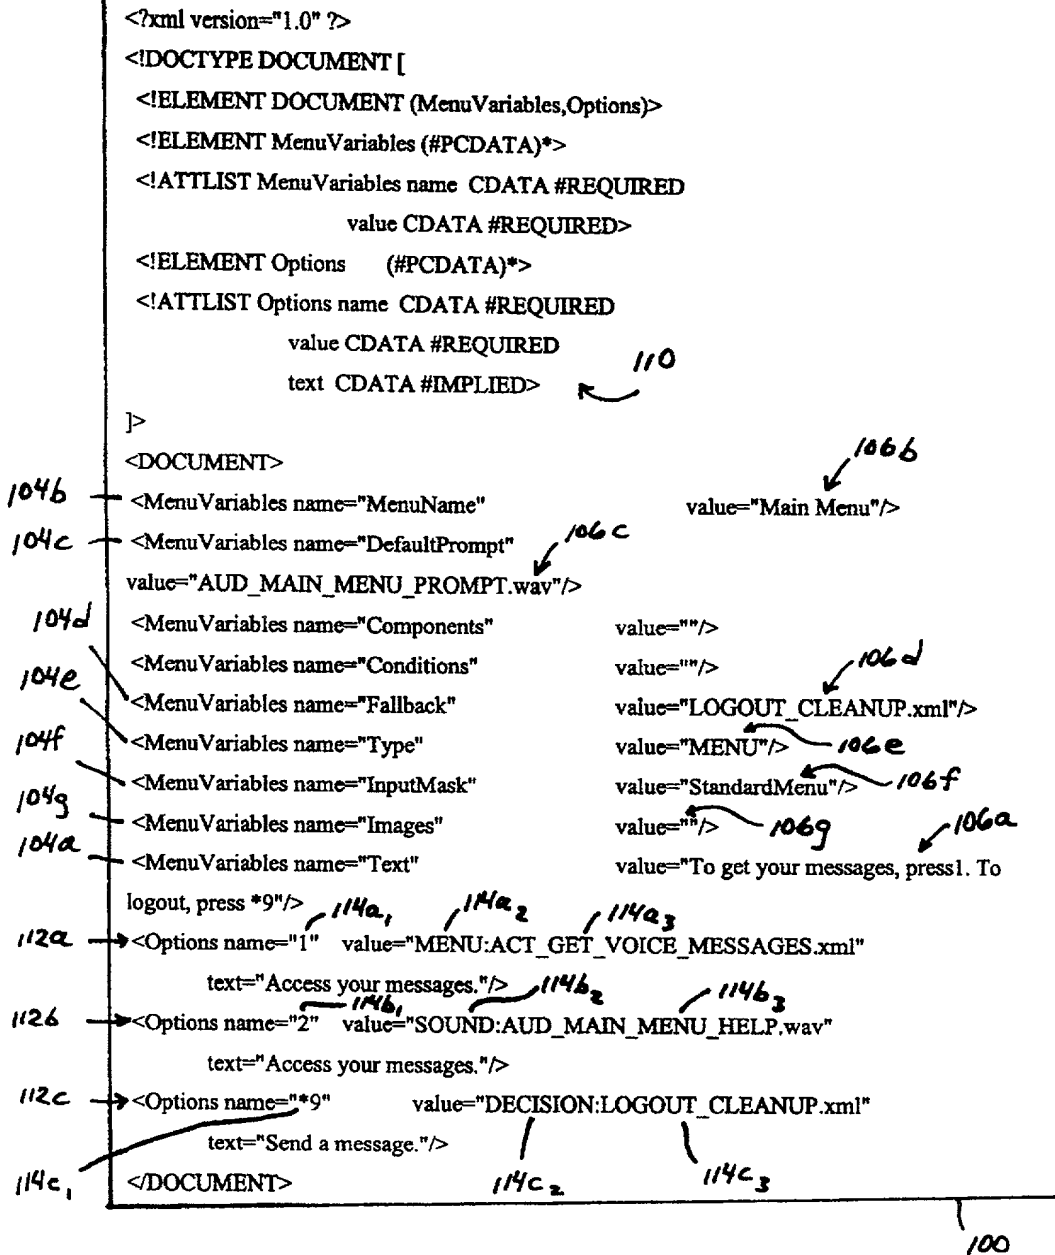


Figure 3

XML Development Tool 1066

118 120 108b

Current State: AUD_MAIN_MENU.xml Menu Name: Main Menu 126d Match all changes 126d Accept

116a.1 Name: 116a.2 Create a new XML 126a Open an existing XML 126c 116a.3 Action taken: 116a.4

116a.5 Name: 116a.6 Type: 116a.7 MENU 116a.8 SOUND 116a.9 DECISION 116a.10

116a.11 AUD_GET_VOICE_MESSAGES.xml 114a.3 116a.12 AUD_MAIN_MENU_HELPWAY 114b.3 116a.13 LOGOUT_CLEANUP.xml 114c.3 108a 108b 114c.2 106b 116c.1 114 116c.2 116c.3

Menu Name: Main Menu 108c

Default Prompt: 108d

Components: 108e

Conditions: 108f

Fallback: 108g

Type: 108h

Input Mask: 108i

Images: 108j

106c

106d

106e

106f

106g

106h

106i

106j

106k

106l

106m

106n

106o

106p

106q

106r

106s

106t

106u

106v

106w

106x

106y

106z

107a

107b

107c

107d

107e

107f

107g

107h

107i

107j

107k

107l

107m

107n

107o

107p

107q

107r

107s

107t

107u

107v

107w

107x

107y

107z

108a

108b

108c

108d

108e

108f

108g

108h

108i

108j

108k

108l

108m

108n

108o

108p

108q

108r

108s

108t

108u

108v

108w

108x

108y

108z

109a

109b

109c

109d

109e

109f

109g

109h

109i

109j

109k

109l

109m

109n

109o

109p

109q

109r

109s

109t

109u

109v

109w

109x

109y

109z

110a

110b

110c

110d

110e

110f

110g

110h

110i

110j

110k

110l

110m

110n

110o

110p

110q

110r

110s

110t

110u

110v

110w

110x

110y

110z

111a

111b

111c

111d

111e

111f

111g

111h

111i

111j

111k

111l

111m

111n

111o

111p

111q

111r

111s

111t

111u

111v

111w

111x

111y

111z

112a

112b

112c

112d

112e

112f

112g

112h

112i

112j

112k

112l

112m

112n

112o

112p

112q

112r

112s

112t

112u

112v

112w

112x

112y

112z

113a

113b

113c

113d

113e

113f

113g

113h

113i

113j

113k

113l

113m

113n

113o

113p

113q

113r

113s

113t

113u

113v

113w

113x

113y

113z

114a

114b

114c

114d

114e

114f

114g

114h

114i

114j

114k

114l

114m

114n

114o

114p

114q

114r

114s

114t

114u

114v

114w

114x

114y

114z

115a

115b

115c

115d

115e

115f

115g

115h

115i

115j

115k

115l

115m

115n

115o

115p

115q

115r

115s

115t

115u

115v

115w

115x

115y

115z

116a

116b

116c

116d

116e

116f

116g

116h

116i

116j

116k

116l

116m

116n

116o

116p

116q

116r

116s

116t

116u

116v

116w

116x

116y

116z

117a

117b

117c

117d

117e

117f

117g

117h

117i

117j

117k

117l

117m

117n

117o

117p

117q

117r

117s

117t

117u

117v

117w

117x

117y

117z

118a

118b

118c

118d

118e

118f

118g

118h

118i

118j

118k

118l

118m

118n

118o

118p

118q

118r

118s

118t

118u

118v

118w

118x

118y

118z

119a

119b

119c

119d

119e

119f

119g

119h

119i

119j

119k

119l

119m

119n

119o

119p

119q

119r

119s

119t

119u

119v

119w

119x

119y

119z

120a

120b

120c

120d

120e

120f

120g

120h

120i

120j

120k

120l

120m

120n

120o

120p

120q

120r

120s

120t

120u

120v

120w

120x

120y

120z

121a

121b

121c

121d

121e

121f

121g

121h

121i

121j

121k

121l

121m

121n

121o

121p

121q

121r

121s

121t

121u

121v

121w

121x

121y

121z

122a

122b

122c

122d

122e

122f

122g

122h

122i

122j

122k

122l

122m

122n

122o

122p

122q

122r

122s

122t

122u

122v

122w

122x

122y

122z

123a

123b

123c

123d

123e

123f

123g

123h

123i

123j

123k

123l

123m

123n

123o

123p

123q

123r

123s

123t

123u

123v

123w

123x

123y

123z

124a

124b

124c

124d

124e

124f

124g

124h

124i

124j

124k

124l

124m

124n

124o

124p

124q

124r

124s

124t

124u

124v

124w

124x

124y

124z

125a

125b

125c

125d

125e

125f

125g

125h

125i

125j

125k

125l

125m

125n

125o

125p

125q

125r

125s

125t

125u

125v

125w

125x

125y

125z

126a

126b

126c

126d

126e

126f

126g

126h

126i

126j

126k

126l

126m

126n

126o

126p

126q

126r

126s

126t

126u

126v

126w

126x

126y

126z

127a

127b

127c

127d

127e

127f

127g

127h

127i

127j

127k

127l

127m

127n

127o

127p

127q

127r

127s

127t

127u

127v

127w

127x

127y

127z

128a

128b

128c

128d

128e

128f

128g

128h

128i

128j

128k

128l

128m

128n

128o

128p

128q

128r

128s

128t

128u

128v

128w

128x

128y

128z

129a

129b

129c

129d

129e

129f

129g

129h

129i

129j

129k

129l

129m

129n

129o

129p

129q

129r

129s

129t

129u

129v

129w

129x

129y

129z

130a

130b

130c

130d

130e

130f

130g

130h

130i

130j

130k

130l

130m

130n

130o

130p

130q

130r

130s

130t

130u

130v

130w

130x

130y

130z

131a

131b

131c

131d

131e

131f

131g

131h

131i

131j

131k

131l

131m

131n

131o

131p

131q

131r

131s

131t

131u

131v

131w

131x

131y

131z

132a

132b

132c

132d

132e

132f

132g

132h

132i

132j

132k

132l

132m

132n

132o

132p

132q

132r

132s

132t

132u

132v

132w

132x

132y

132z

133a

133b

133c

133d

133e

133f

133g

133h

133i

133j

133k

133l

133m

133n

133o

133p

133q

133r

133s

133t

133u

133v

133w

133x

133y

133z

134a

134b

134c

134d

134e

134f

134g

134h

134i

134j

134k

134l

134m

134n

134o

134p

134q

134r

134s

134t

134u

134v

134w

134x

134y

134z

135a

135b

135c

135d

135e

135f

135g

135h

135i

135j

135k

135l

135m

135n

135o

135p

135q

135r

135s

135t

135u

135v

135w

135x

135y

135z

136a

136b

136c

136d

136e

136f

136g

136h

136i

136j

136k

136l

136m

136n

136o

136p

136q

136r

136s

136t

136u

136v

136w

136x

136y

136z

137a

137b

137c

137d

137e

137f

137g

137h

137i

137j

137k

137l

137m

137n

137o

137p

137q

137r

137s

137t

137u

137v

137w

137x

137y

137z

138a

138b

138c

138d

138e

138f

138g

138h

138i

138j

138k

138l

138m

138n

138o

138p

138q

138r

138s

138t

138u

138v

138w

138x

138y

138z

139a

139b

139c

139d

139e

139f

139g

139h

139i

139j

139k

139l

139m

139n

139o

139p

139q

139r

139s

139t

139u

139v

139w

139x

139y

139z

140a

140b

140c

140d

140e

140f

140g

140h

140i

140j

140k

140l

140m

140n

140o

140p

140q

140r

140s

140t

140u

140v

140w

140x

140y

140z

141a

141b

141c

141d

141e

141f

141g

141h

141i

141j

141k

141l

141m

141n

141o

141p

141q

141r

141s

141t

141u

141v

141w

141x

141y

141z

142a

142b

142c

142d

142e

142f

142g

142h

142i

142j

142k

142l

142m

142n

142o

142p

142q

142r

142s

142t

142u

142v

142w

142x

142y

142z

143a

143b

143c

143d

143e

143f

143g

143h

143i

143j

143k

143l

143m

143n

143o

143p

143q

143r

143s

143t

143u

143v

143w

143x

143y

143z

144a

144b

144c

144d

144e

144f

144g

144h

144i

144j

144k

144l

144m

144n

144o

144p

144q

144r

144s

144t

144u

144v

144w

144x

144y

144z

145a

145b

145c

145d

145e

145f

145g

145h

145i

145j

145k

145l

145m

145n

145o

145p

145q

145r

145s

145t

145u

145v

145w

145x

145y

145z

146a

146b

146c

146d

146e

146f

146g

146h

146i

146j

146k

146l

146m

146n

146o

146p

146q

146r

146s

146t

146u

146v

146w

146x

146y

146z

147a

147b

147c

147d

147e

147f

147g

147h

147i

147j

147k

147l

147m

147n

147o

147p

147q

147r

147s

147t

147u

147v

147w

147x

147y

147z

148a

148b

148c

148d

148e

148f

148g

148h

148i

148j

148k

148l

148m

148n

148o

148p

148q

148r

148s

148t

148u

148v

148w

148x

148y

148z

149a

149b

149c

149d

149e

149f

149g

149h

149i

149j

149k

149l

149m

149n

149o

149p

149q

149r

149s

149t

149u

149v

149w

149x

149y

149z

150a

150b

150c

150d

150e

150f

150g

150h

150i

150j

150k

150l

150m

150n

150o

150p

150q

150r

150s

150t

150u

150v

150w

150x

150y

150z

151a

151b

151c

151d

151e

151f

151g

151h

151i

151j

151k

151l

151m

151n

151o

151p

151q

151r

151s

151t

151u

151v

151

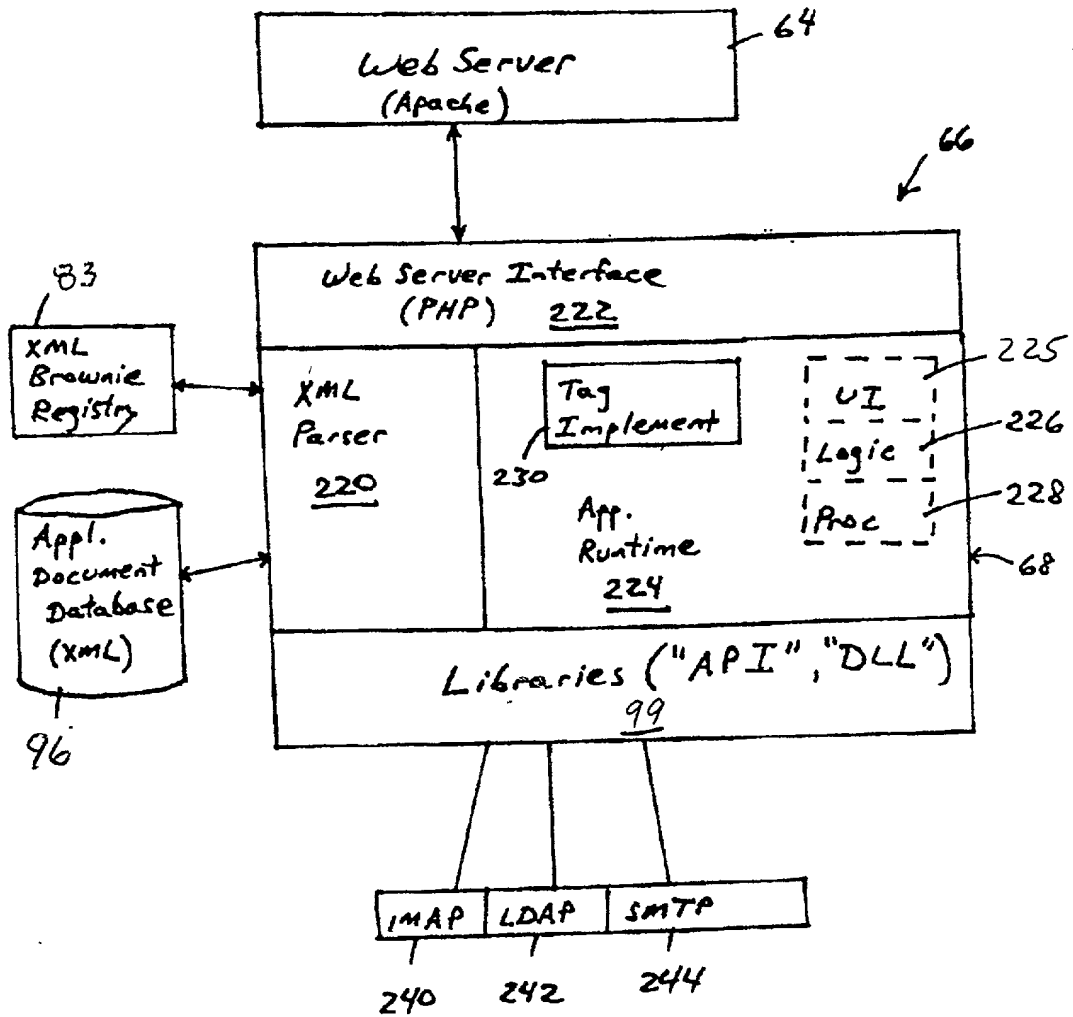


Figure 5

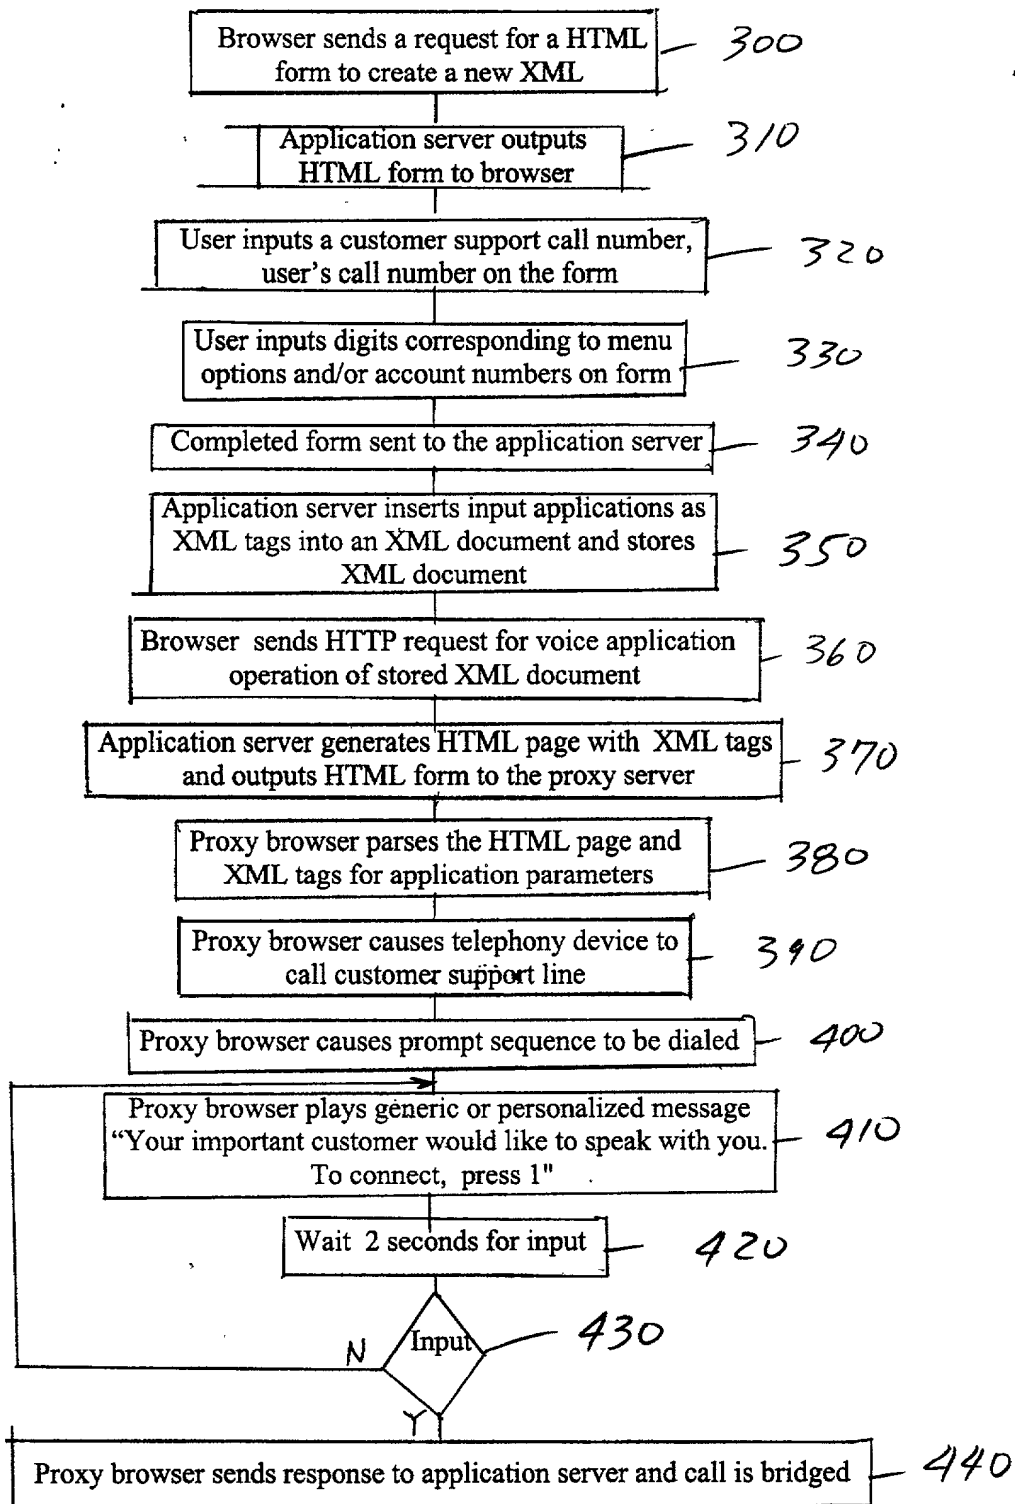


FIG. 6